

## LED WRAP AROUND FIXTURE

PID: SL913WA



### APPLICATIONS:

- RETAIL LIGHTING
- STORAGE AREAS
- CLOSETS
- EDUCATION FACILITIES
- HALLWAYS

## SPECIFICATIONS:

### FEATURES

Smart Design to easily add the reflector  
 Polycarbonate lens  
 Frosted lens

### ENERGY DATA

Driver 120-277V  
 Dimmable 0-10V  
 Power Factor: > 0.95  
 THD < 20%  
 Surge protection

### LED MODULES

Available Kelvin temperature of 40K  
 Beam angle:  
 CRI > 80  
 50,000 hour rated life

### ADD ONS

Reflectors available (set of 2)

### CERTIFICATIONS

UL certified

### WARRANTY


5 year warranty

## PRODUCT DETAILS

Product	Watts	Length	Voltage	Amps	CCT	Dimming
SL913WA	40W	48"	100/277V	.351	40K	0-10V

1. CCT range complies to ANSI C78.377-2008  
 2. Rated average life based on engineering testing and probability analysis  
 3. Lifetime test consistent with IESNA LM80 lumen maintenance procedure

# LM79 REPORT LM Report based on 40W Wrap around fixture

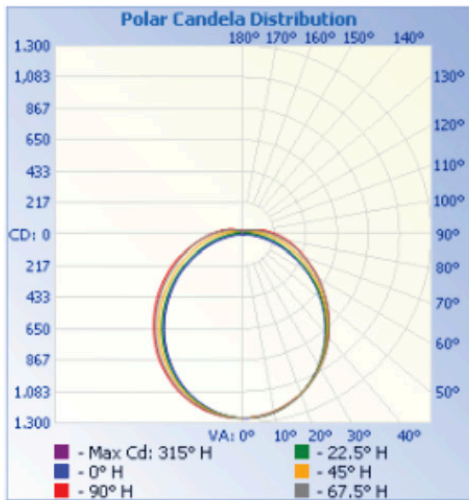

	Center Beam fc	Beam Width	
17.0ft	4.38 fc	45.0 ft	56.2 ft
34.0ft	1.10 fc	90.1 ft	112.5 ft
51.0ft	0.49 fc	135.1 ft	168.7 ft
68.0ft	0.27 fc	180.1 ft	224.9 ft
85.0ft	0.18 fc	225.1 ft	281.2 ft
102.0ft	0.12 fc	270.2 ft	337.4 ft

■ Vert. Spread: 105.9°  
■ Horiz. Spread: 117.7°

Zone	Lumens	% Luminaire
0-30	973.5	24%
0-40	1,585.5	39.1%
0-60	2,789.8	68.7%
60-90	976.4	24.1%
70-100	624.6	15.4%
90-120	214.5	5.3%
0-90	3,766.2	92.8%
90-180	292.9	7.2%
0-180	4,059.0	100%

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	119.7	2.9%	90-100	110.0	2.7%
10-20	341.2	8.4%	100-110	64.4	1.6%
20-30	512.7	12.6%	110-120	40.0	1%
30-40	612.0	15.1%	120-130	28.0	0.7%
40-50	630.4	15.5%	130-140	20.6	0.5%
50-60	573.8	14.1%	140-150	14.2	0.3%
60-70	461.8	11.4%	150-160	9.0	0.2%
70-80	322.0	7.9%	160-170	5.0	0.1%
80-90	192.6	4.7%	170-180	1.6	0%

## BOX DIMENSIONS

Product	Length (Inches)	Width (Inches)	Height (Inches)	Count Per Box
40W	45.6	4.75	2.75	6 pcs

## ORDERING GUIDE

ORDER CODE	WATTS	VOLTS	ACCESSORIES
SL913WA	40W	SU = 100/277V	Reflector Blank for none

ORDER EXAMPLE: SL913WA-40W-SU-Reflector