


STREAMLINE T5

PID: SL917T5

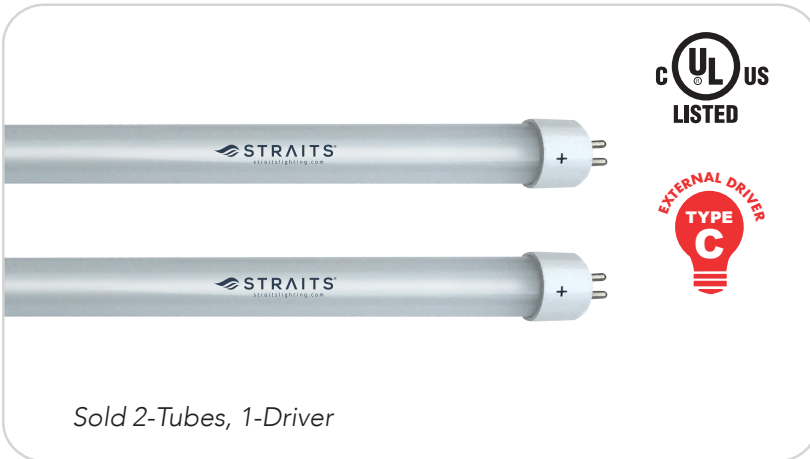

APPLICATIONS:

- RETROFIT FLUORESCENT TUBES
- OFFICE LIGHTING
- RETAIL LIGHTING

SPECIFICATIONS:

FEATURES

- Integrated aluminum heat sink
- Shatterproof plastic lens (Clear and Frosted)
- High shock and vibrant resistant
- Min starting temperature -4°F (-20°C)
- Max starting temperature 122°F (50°C)

ENERGY DATA

- External Driver: 100-277V
- Dimmable and Non-dimmable available
- Power Factor > 0.99
- THD < 20%

LED MODULES

- SMD LED chips
- Available Kelvin temperature of 40K and 50K
- Beam Angle: 120°
- CRI > 80
- LED lifespan of 50,000 hours

MOUNTING

- Bi-Pin (G5)
- Double-end connection type
- Type C
- External Driver

CERTIFICATIONS

- LM79 tested
- UL / cUL certified

WARRANTY


- 5 year warranty

PRODUCT DETAILS

Product Code	Voltage	Length (Inch)	Lumens ^{1,2}	Efficacy*	CCT ¹	Beam Angle	Replacement
T5-15W	100-277V	48"	1677	140	40K, 50K	120°	28W FL-T5-4'

1. CCT range complies to ANSI C78.377-2008
 2. Rated average life based on engineering testing and probability analysis
 3. Lifetime test consistent with IESNA LM80 lumen maintenance procedure

LM79 REPORT Tests based on 15W T8 tube

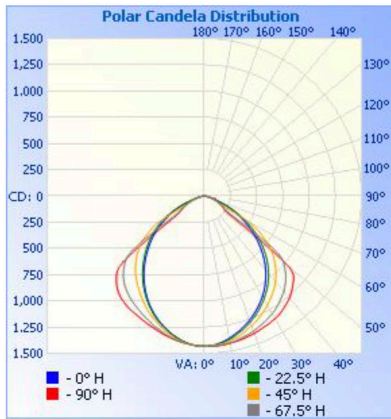

Illuminance at a Distance		
Center Beam fc	Beam Width	
17.0ft	4.95 fc	37.9 ft 43.6 ft
34.0ft	1.24 fc	75.9 ft 87.3 ft
51.0ft	0.55 fc	113.8 ft 130.9 ft
68.0ft	0.31 fc	151.8 ft 174.6 ft
85.0ft	0.20 fc	189.7 ft 218.2 ft
102.0ft	0.14 fc	227.7 ft 261.9 ft

■ Vert. Spread: 96.3°
■ Horiz. Spread: 104.2°

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	1,098.6	32.7%
0-40	1,805.3	53.7%
0-60	3,056.5	91%
60-90	302.3	9%
70-100	83.9	2.5%
90-120	0.0	0%
0-90	3,358.9	100%
90-180	0.1	0%
0-180	3,359.0	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	135.0	4.0%	90-100	0	0%
10-20	383.5	11.4%	100-110	0.0	0%
20-30	580.0	17.3%	110-120	0.0	0%
30-40	706.8	21.0%	120-130	0.0	0%
40-50	739.4	22.0%	130-140	0.0	0%
50-60	511.8	15.2%	140-150	0.0	0%
60-70	218.4	6.5%	150-160	0.0	0%
70-80	72.6	2.2%	160-170	0.0	0%
80-90	11.3	0.3%	170-180	0.0	0%

BOX DIMENSIONS

Watts	Length (Inches)	Width (Inches)	Height (lbs)	Count Per Box
T5-15W	50	9	10	56 pcs

ORDERING GUIDE

ORDER CODE	LENGTH	WATTS	VOLTS	CCT	DIMMING	BASE
SL917T5	48 = 48"	15W	SU = 100-277V	40K = 4000K 50K = 5000K	D = Dimming	G5

ORDER EXAMPLE: SL917T5 - 48 - 15W - SU - 40K - D - G5