



LED CANOPY LIGHT

PID: SL923CLE



APPLICATIONS

CAR PORTS
 WALKWAYS
 STORAGE AREAS
 CANOPIES
 PARKING GARAGES

SPECIFICATIONS

- **Construction:** ADC12 Aluminum heat sink; LUMILEDS LED Chips; Outdoor powder coating
- **Operating Temperature:** -40°F to 104°F (-40°C to 40°C)
- **Energy Data:** Internal Driver 120-277V; THD <20%; Power factor >.90
- **Mounting:** Ceiling mounted
- **Certifications:** UL Certified, LM79, IP65
- **Rated Life:** 50,000 hours
- **Warranty:** 5 years


PRODUCT DETAILS

Watts	Input	Kelvin ¹	Lumens ^{1,2}	Amps	Dimming	Bug	Beam Angle	CRI
25W	120-277V	30K, 40K, 50K	2,900	.3A	0-10V	B1-U2-G1	140°	> 80
40W			4,800	.45A		B2-U2-G1		
60W			7,400	1.0A		B2-U3-G2		
75W			9,200	1.0A		B3-U3-G2		

SOLD OUT


DIMENSIONS

Watts	Length	Width	Height
25W	8"	8"	3"
40W			
60W	10"	10"	3.25"
75W			

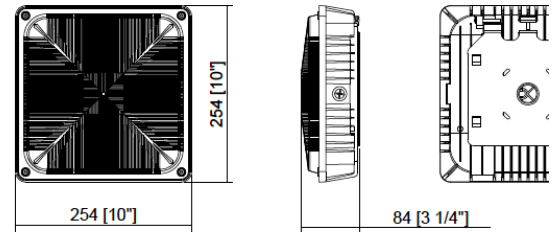

LM79 REPORT

Results based on 60W

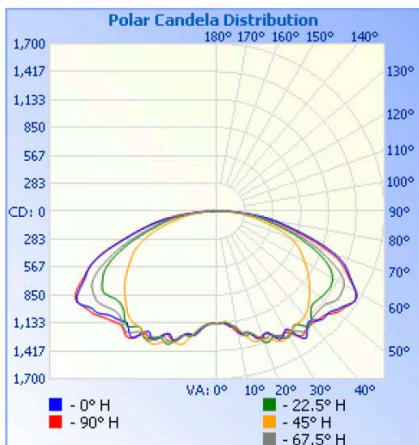

Illuminance at a Distance		
Center Beam fc	Beam Width	
17.0ft	3.95 fc	48.2 ft 133.1 ft
34.0ft	0.99 fc	96.4 ft 266.3 ft
51.0ft	0.44 fc	144.6 ft 399.4 ft
68.0ft	0.25 fc	192.8 ft 532.5 ft
85.0ft	0.16 fc	241.1 ft 665.7 ft
102.0ft	0.11 fc	289.3 ft 798.8 ft

■ Vert. Spread: 109.6°
■ Horiz. Spread: 151.3°

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,150.0	16.8%	16.8%
0-40	2,069.2	30.2%	30.2%
0-60	4,437.7	64.7%	64.7%
60-90	2,300.6	33.6%	33.6%
70-100	1,163.0	17%	17%
90-120	107.3	1.6%	1.6%
0-90	6,738.3	98.3%	98.3%
90-180	118.5	1.7%	1.7%
0-180	6,856.8	100%	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	112.5	1.6%	90-100	68.0	1%
10-20	376.7	5.5%	100-110	29.7	0.4%
20-30	660.8	9.6%	110-120	9.6	0.1%
30-40	919.2	13.4%	120-130	3.4	0%
40-50	1,099.0	16.0%	130-140	2.6	0%
50-60	1,269.4	18.5%	140-150	2.2	0%
60-70	1,205.6	17.6%	150-160	1.7	0%
70-80	786.1	11.5%	160-170	1.1	0%
80-90	309.0	4.5%	170-180	0.4	0%

ORDER EXAMPLE: SL923CLE — 25W — SU — 50K — D — CL — BR

PRODUCT ID	WATTAGE:	SU=120-277V	CCT:	D=DIMMING	CL = Ceiling PD = Pendant	BR= Brown WH= White BK= Black GY= Gray
	25W 40W 60W 75W		30K=3000K 40K=4000K 50K=5000K			