

STRAITS WALL LIGHT

PID: SL923WMV



APPLICATIONS:

- INDOOR & OUTDOOR DECORATIVE LIGHTING
- ENTRY WAYS
- HOTEL LOBBIES
- CAN BE VERTICAL OR HORIZONTAL

SPECIFICATIONS:

FEATURES

- ADC12 Aluminum heat sink
- Outdoor powder coating
- Tempered Glass
- Min starting temperature -4°F (-20°C)
- Max. starting temperature 104°F (40°C)

ENERGY DATA

- Internal Driver: 120-277V
- Power Factor > 0.90
- Total Harmonic Distortion < 20%
- Surge protection 6~10KV

LED MODULES

- LUMILEDS LED chips
- Available Kelvin temperature of 40K and 50K
- CRI > 80
- 50,000 hour rated life


CERTIFICATIONS

- UL certified
- LM79 tested
- IP65 Rated

WARRANTY

- 2 year warranty

COVER OPTIONS


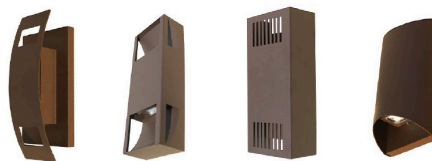


PRODUCT DETAILS

PRODUCT	WATTS	INPUT	KELVIN	LUMENS	BEAM ANGLE
SL923WMV	15W	120-277V	40k, 50k	1,350	120°

1. CCT range complies with ANSI C78.377-2008
 2. Rated average life based on engineering testing and probability analysis
 3. Lifetime test consistent with IESNA LM80 lumen maintenance procedure
 4. Wattage, Lumens, and Lamp Efficacy are dependent upon efficiency of existing ballast.

PHOTOMETRIC

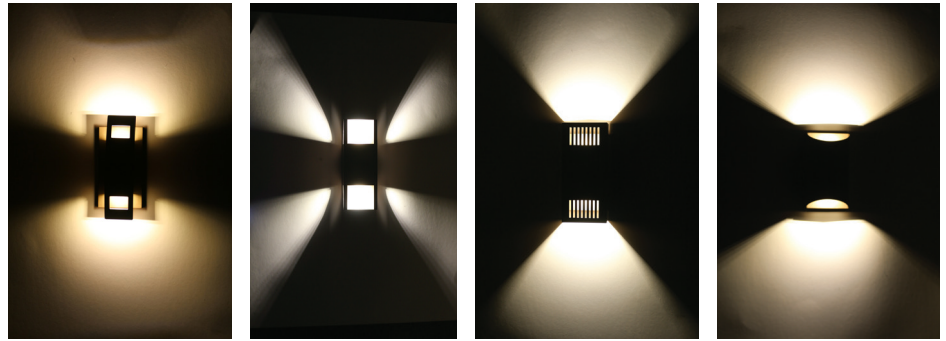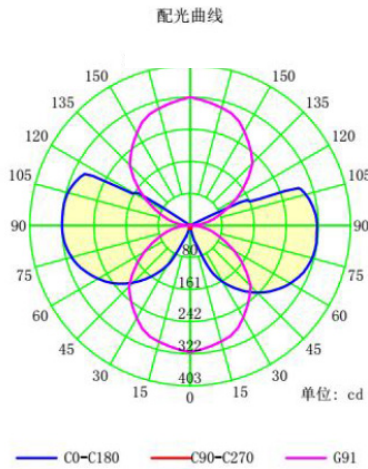

BUCKLE

DECO


SHUTTER

MODERN



PRODUCT DIMENSIONS

Wattage	Length (Inches)	Width (Inches)	Height (Inches)
15W	4.3"	2.1"	8.0"
Buckle	4.3"	2.6"	10.1"
Deco	4.5"	2.5"	12.0"
Shutter	4.5"	2.5"	12.0"
Modern	4.5"	2.8"	8.0"



15W

ORDERING GUIDE

ORDER CODE	WATTS	VOLTAGE	CCT
SL923WMV	15W	SU=100-277V	40K = 4000K 50K = 5000K

ORDER EXAMPLE: SL923WMV - 15W - SU - 50K