

FEATURES

- Flicker free
- Light weight and durable aluminum + PC housing
- Earthquake clips for secure recessed applications
- Recessed, Surface or Suspended mounting options
- 50,000 hours lifetime



SUITABLE APPLICATIONS

- Government Buildings
- Corporate Offices
- Hospitals
- Schools
- Colleges
- And more!

TECHNICAL DATA

CRI: Ra83

Operation Temperature: -4 ~113 °F

Input Voltage: AC 120-277V



Beam Angle: 113°

Dimming: 0-10V


DIMENSIONS UNIT: INCH




1 x 4

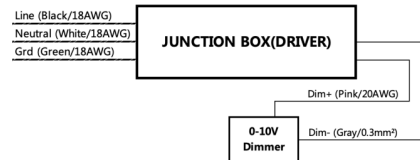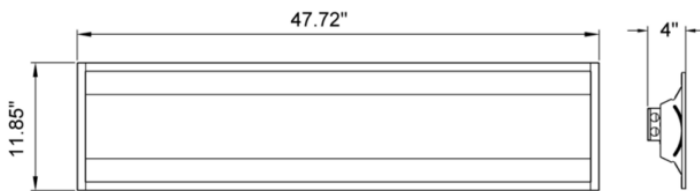

2 x 2

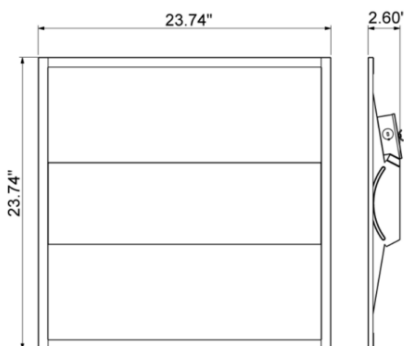


2 x 4

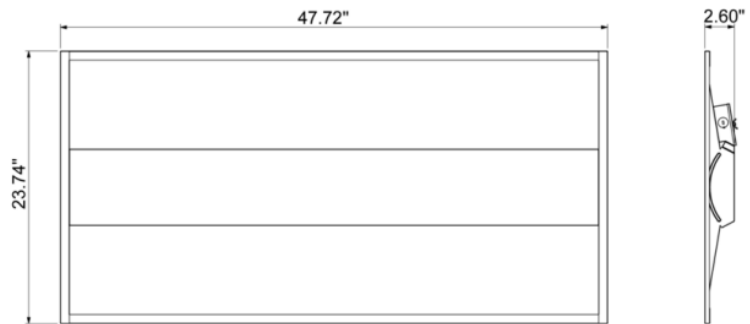


MODEL	WATTS	LUMENS	COLOR TEMP.
SL960TROF-1X4-ADJ	15W 20W 30W	1950lm 3250lm 3900lm	3500K 4000K 5000K
SL960TROF-2X2-ADJ	15W 20W 30W	1950lm 3250lm 3900lm	3500K 4000K 5000K
SL960TROF-2X4-ADJ	40W 45W 50W	5200lm 5850lm 6500lm	3500K 4000K 5000K

MOUNTING OPTIONS

Troffer fixtures require surface mount kits.



Cable Suspension Kit for Troffer Fixture

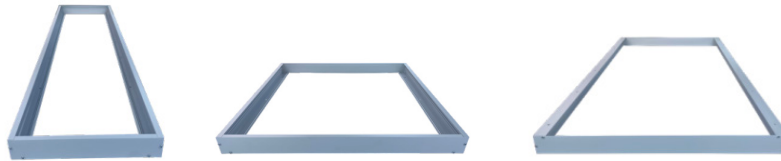

Surface Mount Kit for Troffer Fixture.