

MODEL:	TYPE
PROJECT:	
PREPARED BY:	
DATE:	

## STREAMLINE LED T8 MX-SERIES

PID: SL960T8BC



### APPLICATIONS:

- RETROFIT FLUORESCENT TUBES
- BEST FOR LED READY FIXTURES
- OFFICE / RETAIL LIGHTING
- SCHOOL BUILDINGS
- HOSPITALS
- PAINT BOOTHS
- GOVERNMENT BUILDINGS

## SPECIFICATIONS:

### FEATURES

- Integrated extruded aluminum heat sink
- Aluminum + PC casing
- Plastic Frosted lens
- Compatible with majority of T8 electronic ballast
- May bypass ballast for direct wire
- Single or Double-ended connection
- Suitable for enclosed fixtures
- Dimmable/Non-Dimmable

### CERTIFICATIONS

- ETL Certified
- DLC Certified

### MOUNTING

- G13 Bi-pin
- Type A & B


### WARRANTY

- 5 year warranty
- 50,000 hour rated life

*We recommend testing a trial lamp before placing a large order.*

### ENERGY DATA

- Internal driver: 100-277V
- Operation Temperature -4 ~122 F
- Power Factor > 0.95

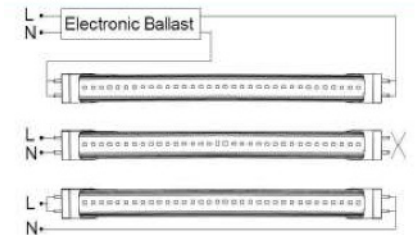

## ORDERING GUIDE

SKU	Description	Wattage	Lumens	Color Temp	DLC
11052437-1	SL960T8BC-48-14W-100/277V-4000-F-120-I-N-G13-SD-1	14W	2145	4000K	N/A
11052437-1D	SL960T8BC-48-14W-100/277V-4000-F-120-I-D-G13-SD-1	14W	2145	4000K	YES
11052439-1	SL960T8BC-48-14W-100/277V-5000-F-120-I-N-G13-SD-1	14W	2175	5000K	N/A
11052439-1D	SL960T8BC-48-14W-100/277V-5000-F-120-I-D-G13-SD-1	14W	2175	5000K	YES
11052451-1	SL960T8BC-48-18W-100/277V-4000-F-120-I-N-G13-SD-1	18W	2700	4000K	N/A
11052451-1D	SL960T8BC-48-18W-100/277V-4000-F-120-I-D-G13-SD-1	18W	2700	4000K	YES
11052453-1	SL960T8BC-48-18W-100/277V-5000-F-120-I-N-G13-SD-1	18W	2700	5000K	N/A
11052453-1D	SL960T8BC-48-18W-100/277V-5000-F-120-I-D-G13-SD-1	18W	2700	5000K	YES