

## APPLICATIONS

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

## FEATURES

- Sealed die-casting for indoor and outdoor applications.
- Voltage is 120-277V & 347-480V
- 1-10V dimming standard.
- Superior color rendition index compared to HPS.
- Increase energy saving with bi-level motion sensor
- Optional emergency battery.
- Replacing 250W MH and 400W MH.
- Operating temperature is -40°C to 55°C(-40°F to 131°F).
- Hook mount, pendant mount and surface mount available.
- UL and DLC standard qualified




140W & 180W

U Bracket is Optional



67W & 97W

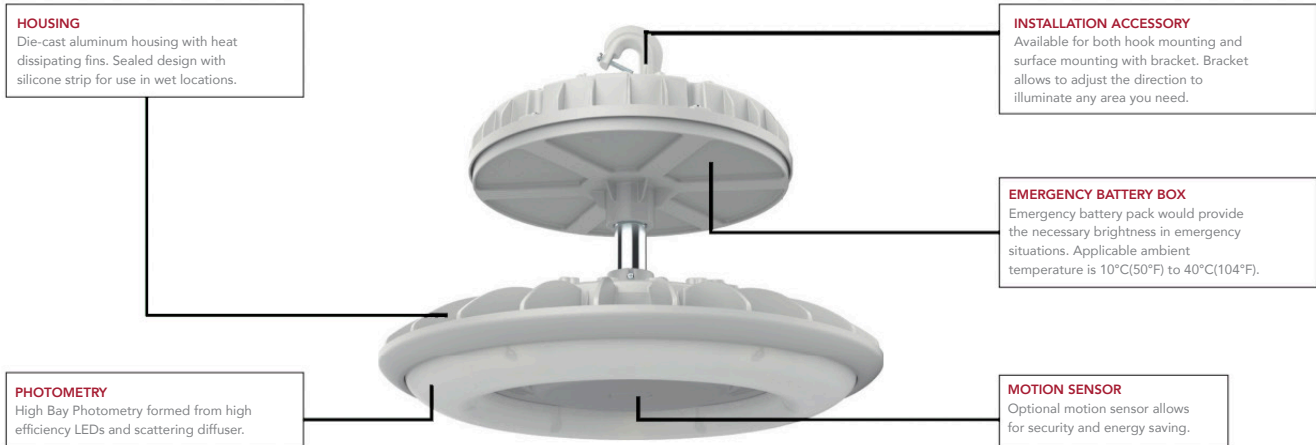

## PERFORMANCE DATA

SYSTEM WATTS	PHOTOMETRY	VOLTAGE	4000K(70CRI)		5000K(70CRI)	
			LUMENS	LPW	LUMENS	LPW
67W	High Bay	120-277VAC	9350lm	140lm/W	9400lm	140lm/W
97W	High Bay	120-277VAC	13600lm	140lm/W	13700lm	141lm/W
140W	High Bay	120-277VAC/347-480V	18900lm	135lm/W	19100lm	136lm/W
180W	High Bay	120-277VAC/347-480V	23500lm	131lm/W	24500lm	136lm/W

**ELECTRICAL DATA**

NUMBER OF DRIVERS	DRIVER CURRENT (MA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (AMPS)
1	1750	67	120	0.56
		67	208	0.32
		67	240	0.28
		67	277	0.24
1	2500	97	120	0.81
		97	208	0.47
		97	240	0.40
		97	277	0.35
2	3500	140	120	1.17
		140	208	0.67
		140	240	0.58
		140	277	0.51
	3700	140	347	0.40
		140	480	0.29
2	4540	180	120	1.50
		180	208	0.87
		180	240	0.75
		180	277	0.65
		180	347	0.52
		180	480	0.38

**DIMENSIONS** UNIT: MM/INCH

**PHOTOMETRICS**

Net weight:  
 67W: 5.710lbs  
 97W: 5.952lbs  
 140W: 9.220lbs  
 180W: 9.480lbs

