

APPLICATIONS:

Suitable for commercial, retail and institutional applications including factories and warehouses.

FEATURES

- Standard 4ft, can be extended by row connector and occlusion block.
- Voltage 120-277V or 347-480V.
- 1-10V dimming available.
- Surface mounting or chain mounting.
- Optional for PIR Sensor and Emergency Battery.
- 50,000 hours projected life span.
- Operating temperature is -40°C to 40°C(-40°F to 104°F).
- UL listed and DLC qualified.




1/2" KNOCKOUTS
End Cap Wiring Knockouts are designed for connecting multiple fixtures, to achieve 4ft, 8ft, 12ft length etc. by row connector.

HOUSING
Advanced thermal management aluminum alloy with white coat finish. Suitable for surface mount and sling mount.

EMERGENCY BATTERY
90min, 900lm

1/2" KNOCKOUTS
Available for bi-level motion sensor.

FROSTED DIFFUSER
Distribute general photometry. Uniformly dispersing the light.



ROW CONNECTOR
The row connector can connect multiple fixtures to form a solid linear fixture group.




OCCUSION BLOCK
Connect fixtures to make one.

PERFORMANCE DATA

SYSTEM WATTS	SIZE	LENS	VOLTAGE	3000K(CRI80)		4000K(CRI80)		5000K(CRI80)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
23W	4 FT	Frosted	120-277VAC/347-480V	2900lm	126lm/W	3000lm	130lm/W	3050lm	133lm/W
35W	4 FT	Frosted	120-277VAC/347-480V	4450lm	127lm/W	4650lm	133lm/W	4700lm	134lm/W
45W	4 FT	Frosted	120-277VAC/347-480V	5850lm	130lm/W	6000lm	133lm/W	6050lm	134lm/W
70W	4 FT	Frosted	120-277VAC	8900lm	127lm/W	9250lm	132lm/W	9400lm	134lm/W

DIMENSIONS UNIT: MM/INCH


Weight
35W: 5.75lbs
45W: 5.88lbs
70W: 6.13lbs

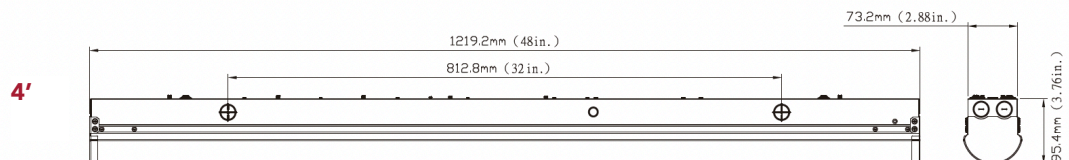

ELECTRICAL DATA

Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
4 FT	1	530	23	120	0.19
			23	208	0.11
			23	240	0.10
			23	277	0.08
		550	23	347	0.07
			23	480	0.05
4 FT	1	850	35	120	0.29
			35	208	0.17
			35	240	0.15
			35	277	0.13
		1020	35	347	0.10
			35	480	0.07
4 FT	1	1120	45	120	0.38
			45	208	0.22
			45	240	0.19
			45	277	0.16
		1200	45	347	0.13
			45	480	0.09
4 FT	1	1650	70	120	0.58
			70	208	0.34
			70	240	0.29
			70	277	0.25

PHOTOMETRICS



ENERGY SAVING PLACEMENT

Size	Power	Replacing
4ft	30	T8x2
4ft	45	T5HOx2
4ft	70	T8HOx2